

**NEW  
MODEL**

## INDUSTRIAL VACUUM CLEANER SYSTEMS ELECTRICALLY OPERATED MODEL 4D-20 DT (MFS) (HEPA FILTRATION AVAILABLE).



- Dual motors / single phase - for dry recovery only.
- Powerful suction - designed for industrial applications.
- Heavy duty powder coated metal construction with grounded suction intake.
- Optional HEPA filter.
- Optional polyliners are available for the safe disposal of recovered materials, including a depressor kit.
- Optional, paper filter bags.



Detachable recovery tank with a capacity of 6 gallons (25 litres) for easy emptying of recovered materials.

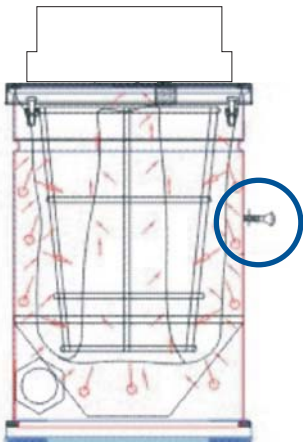


Image is for illustration purposes only

### MANUAL FILTER SHAKER SYSTEM (MFS)

- The filter shaker system consists of a spring action mechanism operating directly onto the filter cage located inside of the filter chamber. The system is operated by pressing on the ergonomic handle located on the side of the filter chamber.
- The Manual Filter Shaker dislodges the accumulated caked-on dust from the filter thus improving the filter's performance.
- A dralon pre-filter for very fine dust is included with the MFS filtration system.
- The filter, along with the filter cage, can be easily removed from the filter chamber and washed with lukewarm water and mild detergents.
- HEPA Filter efficiency of 99.995% @ 0.3 micron. Tested: IEST RP-CC001.3. H14 by MPPS method as per EN 1822. Or ULPA Filter efficiency of 99.999% @ 0.12 micron. Tested: IEST RP-CC001.3. Filtration efficiency of 99.9995% @ 0.18 micron. Tested: IEST RP-CC001.3. U15 by MPPS method as per EN 1822 is available (optional).

**Toll free telephone: 1 800 668-4437**

**Toll free fax: 1 800 668-4439**

**Tiger-Vac Inc. (USA)  
73 S.W. 12 Ave. Bldg.1, Unit 7  
Dania, FL 33004  
USA**

**Tel.: (954) 925-3625**

**Fax.: (954) 925-3626**

**E-mail: sales@tiger-vac.com**

**Web Site: <http://www.tiger-vac.com>**


**Tiger-Vac International Inc.  
2020 Dagenais Blvd. West  
Laval, Quebec  
Canada H7L 5W2**

**Tel.: (450) 622-0100**

**Fax.: (450) 625-3388**

**E-mail: support@tiger-vac.com**

## PERFORMANCE CHART

 Model	Single Phase Volts/Hz	Current Draw Amps	Power Watts	Airflow CFM	Vacuum inches H <sub>2</sub> O	Recovery Capacity Gal. / l
4D-20 (DT) MFS Twin motors (B)	120/60	17	2010	200	90	6/25

**Dimensions:** L23" (59cm) x W21" (54cm) x H39.5" (101cm), 74 lbs. (33.5 kg)

**Noise level:** 78 dB(A) at 6.5' (2m)

### OPTIONAL SUGGESTED TOOLS & ACCESSORIES ø1 ½" (38mm)



Item	Part No.	Description
1.	381377	Floor tool, aluminum, with brush
2.	381380	Utility tool, ABS, with brush
3.	381185M	Dusting brush, aluminum
4.	381188	Crevice tool, aluminum
5.	381197	Crevice tool, plastic
6.	381163	Wand (2 pc.) Chrome with aluminum tool coupling.
7.	381137G	Crushproof suction hose, 10' (3m) long, for use with 2" (50mm) camlock inlet

### OPTIONAL SUGGESTED HEAVY DUTY TOOLS & ACCESSORIES ø2" (50mm)



Item	Part#	Description	Qty
A	500218	Wand without coupling. Chrome.	1
B	500220	Floor tool with squeegee with black plastic neck.	1
C	500222	Adaptor for use with crevice tool and dusting brush.	1
D	500224	Crevice tool.	1
E	500226	Dusting brush.	1

#### ATTENTION:

To recover fuels, oils, solvents, metallic and combustible dusts, please contact our technical sales representatives or visit our web site to view our legally certified Explosion Proof/Dust Ignition Proof Vacuum Cleaner Systems.

For complete details please visit our website at [WWW.TIGER-VAC.COM](http://WWW.TIGER-VAC.COM) or contact one of our technical representatives. Specifications are subject to change without notice. Tiger-Vac is a registered trademark.