

**NEW  
MODEL**

**Tiger-Vac®**  
...The name to vacuum with



**INDUSTRIAL VACUUM CLEANER SYSTEMS**  
**ELECTRICALLY OPERATED**  
**MODEL 2D-20 DT (MFS)**  
(HEPA filtration available)




- Single Phase - For dry recovery only.
- Powerful suction - Designed for industrial applications.
- Heavy duty powder coated metal construction with grounded suction intake.
- Polyliners available for the safe disposal of recovered materials.
- Optional HEPA filter.
- Optional polyliners (SD\*) are available for the safe disposal of recovered materials, including a depressor kit.



Detachable recovery tank with a capacity of 6 gallons (25 litres) for easy emptying of recovered materials.

\*SD: Static Dissipating

**Manual filter shaker system (MFS)**

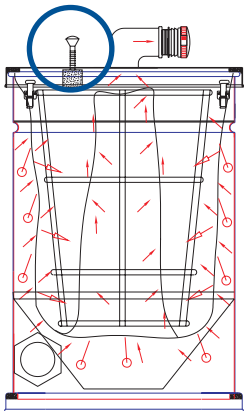

- The filter shaker system consists of a spring action mechanism operating directly onto the filter cage located inside of the filter chamber. The system is operated by pressing on the ergonomic handle located at the top of the filter chamber.
- The Manual Filter Shaker dislodges the accumulated caked-on dust from the filter thus improving the filter's performance.
- A dralon pre-filter for very fine dust is included with the MFS filtration system.
- The filter, along with the filter cage, can be easily removed from the filter chamber and washed with lukewarm water and mild detergents.
- The reusable (washable) and conductive polyester filter with a fluorocarbon treatment has a surface area of 10 ft<sup>2</sup> (9290 cm<sup>2</sup>)
- HEPA Filter efficiency of 99.995% @ 0.3 micron. Tested: IEST RP-CC001.3. . Or ULPA Filter efficiency of 99.999% @ 0.12 micron. Tested: IEST RP-CC001.3. Filtration efficiency of 99.9995% @ 0.18 micron. Tested: IEST RP-CC001.3. is available (optional).

**Toll free telephone: 1 800 668-4437**  
**Toll free fax: 1 800 668-4439**

**Tiger-Vac Inc. (USA)**  
73 S.W. 12 Ave. Bldg.1, Unit 7  
Dania, FL 33004  
USA  
Tel.: (954) 925-3625  
Fax.: (954) 925-3626  
E-mail: [sales@tiger-vac.com](mailto:sales@tiger-vac.com)


**Web Site: <http://www.tiger-vac.com>**

**Tiger-Vac International Inc.**  
2020 Dagenais Blvd. West  
Laval, Quebec  
Canada H7L 5W2  
Tel.: (450) 622-0100  
Fax.: (450) 625-3388  
E-mail: [support@tiger-vac.com](mailto:support@tiger-vac.com)

### PERFORMANCE CHART

Model	Single Phase Volts/Hz	Current Draw Amps	Power Watts	Airflow CFM	Vaccum inches H <sub>2</sub> O	Recovery capacity Gal. <sup>ℓ</sup>
2D-20 (DT) MFS HEPA/ULPA	120/60	10.5	1200	100	110	6/25
<b>Dimensions:</b> L23" (59cm) x W21" (54cm) x H39.5" (101cm), 50 lbs. (22.6 kg)					<b>Noise level:</b> 75 dB(A) at 6.5' (2m)	

### OPTIONAL SUGGESTED HEAVY DUTY TOOLS & ACCESSORIES ø1½" (38mm)

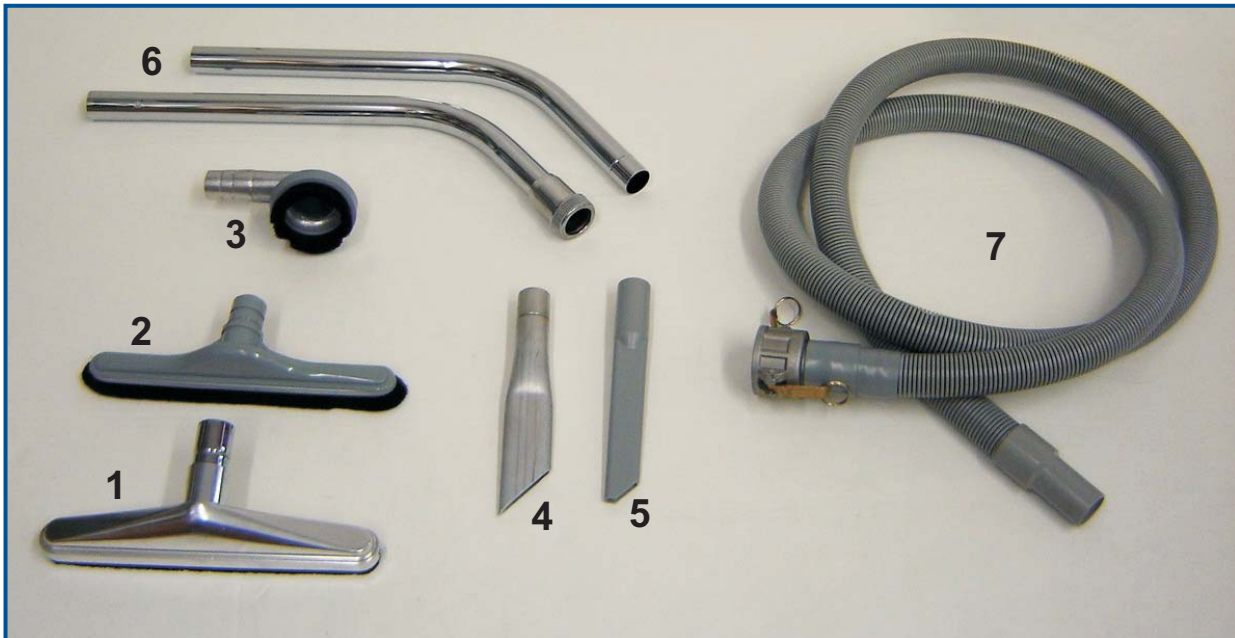

Item	Part No.	Description
1.	381377	Floor tool, aluminum, with brush
2.	381380	Floor utility tool, ABS, with brush
3.	381185M	Dusting brush, aluminum
4.	381188	Crevice tool, aluminum
5.	381197	Crevice tool, plastic
6.	381163	Wand (2 pc.) Chrome with aluminum tool coupling.
7.	381137G	Crushproof suction hose, 10' (3m) long, for use with 2" (50mm) camlock inlet

**ATTENTION:**

To recover fuels, oils, solvents, metallic and combustible dusts, please contact our technical sales representatives or visit our web site to view our legally certified Explosion Proof/Dust Ignition Proof Vacuum Cleaner Systems.